




Roadside safety system

Euro GS[®] N2 W4-4

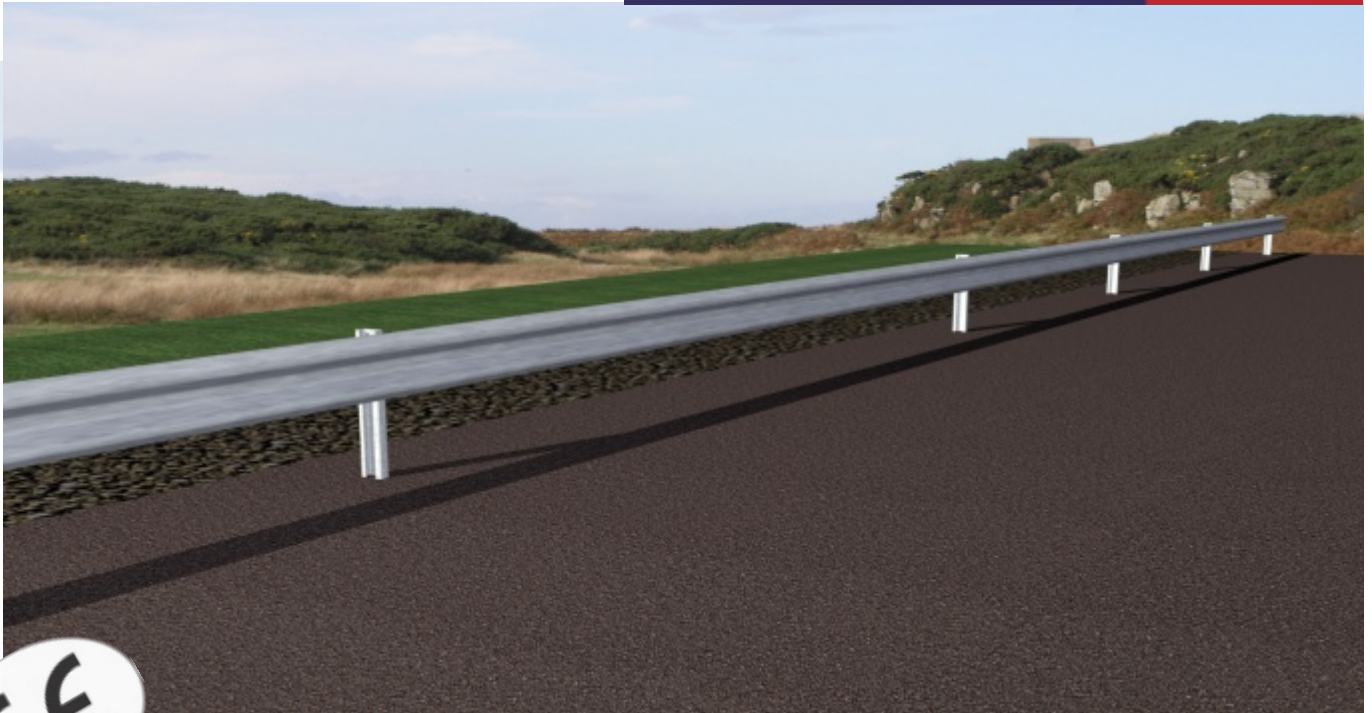

Impact severity level: A
> softest impact system



Adapted to all layouts
> adaptive system



Quick and easy installation/maintenance
> cost-effective system



Carbon footprint reduced by 20 %
> environment friendly system



A large range of add-on components
> versatile system





Fully compatible with installed systems
> consistent system: A profile beam,
C100 post and traditional bolts

- Containment level: N2
- Working width: 1,2 m (W4)
- Dynamic deflection: 1,1 m
- ASI: A
- Post spacing: 4 m
- Working length: 52 m (without ends)
- Efficiency point: 17 m from line start
- Made in Europe
- Hot-dip galvanized according to EN ISO 1461
- Duplex treatment available (hot-dip galvanization + powder coating)



Euro GS® N2 W4.4

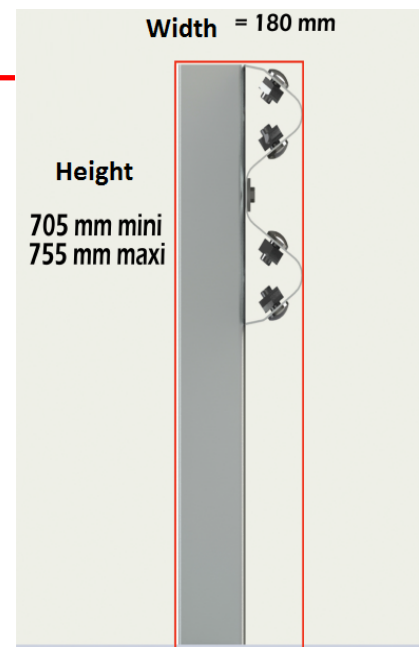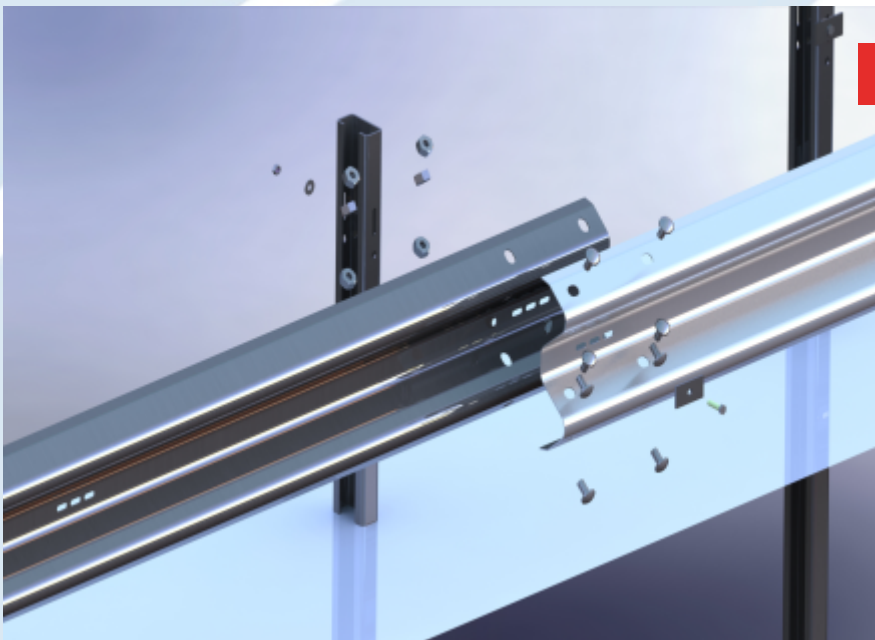

ZI du Pont Panay
03500 Saint-Pourçain-sur-Sioule
Tél: +33 470 459 544
Fax: +33 470 459 893
Email: lpc@galvaunion.com
site internet: www.roadis.fr



Certifié par
BUREAU VERITAS
Certification

