

Roadside safety system

Euro GS° N2 W5

12	
	Containment level: N2
Impact severity level:A	Working width: 1,4 m (W5)
> softest impact system	Dynamic deflection: 1,2 m
Quick and easy installation/maintenance	ASI: A
> cost-effective system	Post spacing: 2 m
Carbon footprint reduced by 20 % > environment friendly system	Working length: 80 m (without ends)
	Efficiency point: 24 m from line start
A large range of add-on components > versatile system	Made in Europe
Fully compatible with installed systems > consistent system: A profile beam, C100 post and traditional bolts	Hot-dip galvanized according to EN ISO 1461
	Duplex treatment available (hot-dip galvanization + powder coating)

I ROADIS


ſ.

Road equipement division of GALVA UNION

Euro GS° N2 W5



EURO GS N2 System with powder coated wood design – Full design set available on request

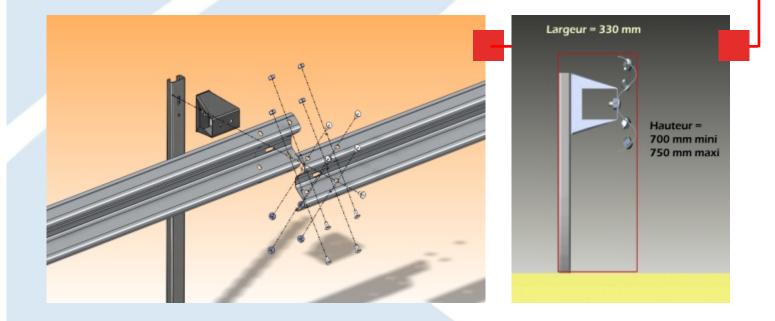



ZI du Pont Panay 03500 Saint-Pourçain-sur-Sioule Tél: +33 470 459 544 Fax: +33 470 459 893 Email: Ipc@galvaunion.com site internet: www.roadis.fr

