




Roadside safety system

Euro GS® N2 W6

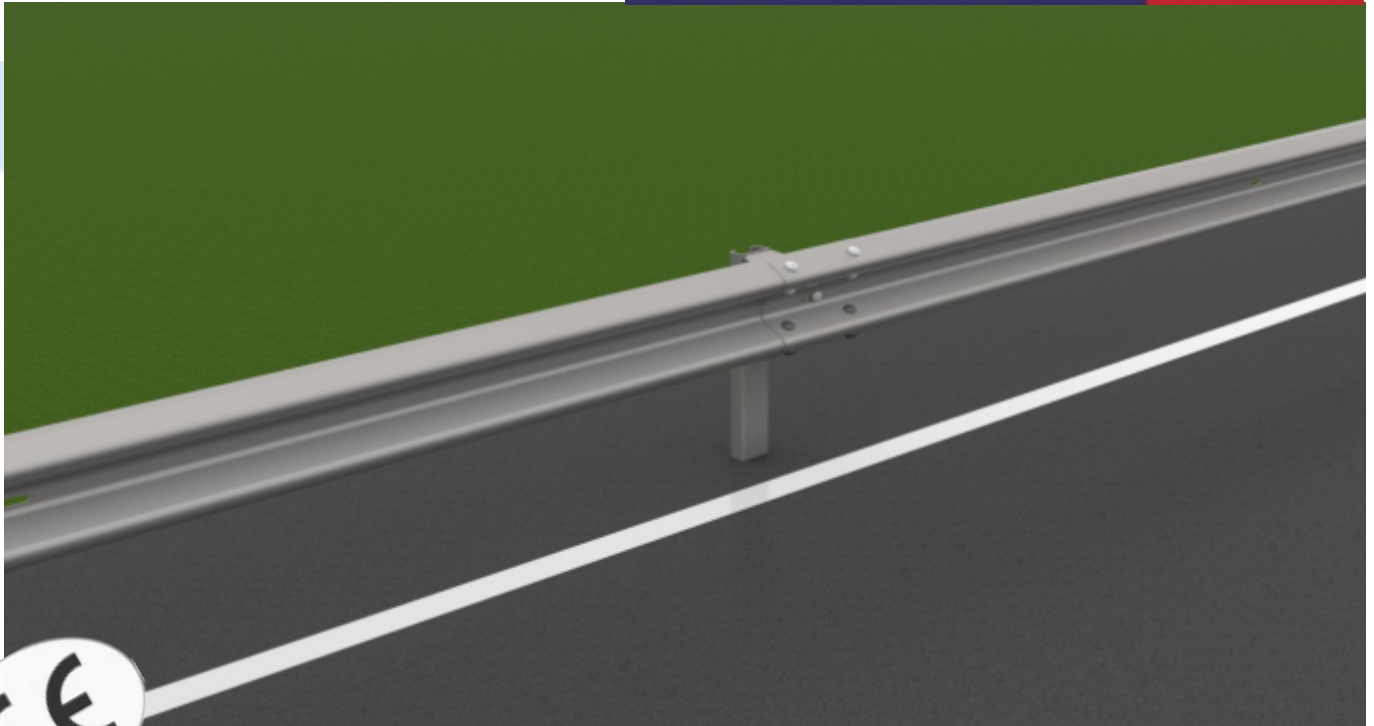

Impact severity level:A

> softest impact system



Quick and easy installation/maintenance

> cost-effective system



Carbon footprint reduced by 20 %
> environment friendly system



A large range of add-on components
> versatile system



Fully compatible with installed systems
> consistent system: A profile beam,
C100 post and traditional bolts

- Containment level: N2
- Working width: 1,9 m (W6)
- Dynamic deflection: 1,6 m
- ASI: A
- Post spacing: 4 m
- Working length: 80 m (without ends)
- Efficiency point: 24 m from line start
- Made in Europe
- Hot-dip galvanized according to EN ISO 1461
- Duplex treatment available (hot-dip galvanization + powder coating)





Système Euro GS N2 thermolaqué décor bois - une palette de décors est disponible sur demande

